

NOBUNAGA Labs

www.nobunagalabs.com

Cosmos sakai Bld 7F

1-32-6 Asakusabashi Taitou-ku

Tokyo, 111-0053, Japan

Tel : 81-3-5829-9857

henry@nobunagalabs.com

NOBUNAGA Labs

About us

Through the establishment of WiseTech, Inc. in 2006 Tokyo, Japan. We have launched a new brand termed Nobunaga Labs in 2014.

Nobunaga Labs heavily values the quality of its manufactured wires. The main priority of the production process is to execute various examinations of the wires in order to procure the flawless performance and sound. We are committed to offer the cables assembled by these diligently processed wires exclusively.

We stand by the quality of our work. High quality products and customer service are guaranteed at an affordable price. Nobunaga Labs is ultimately formed by the boundless passions for music as it continues to challenge itself to discover the superior sound through development and research.

DESIGNED

NOBUNAGA Labs is 100% designed in Japan.

GOOD QUALITY


NOBUNAGA Labs begins with NEEDS for unlimited passion for music sound.

ENJOY

NOBUNAGA Labs has things all generations can enjoy.

WITH US

Now It`s your turn to enjoy NOBUNAGA Labs.

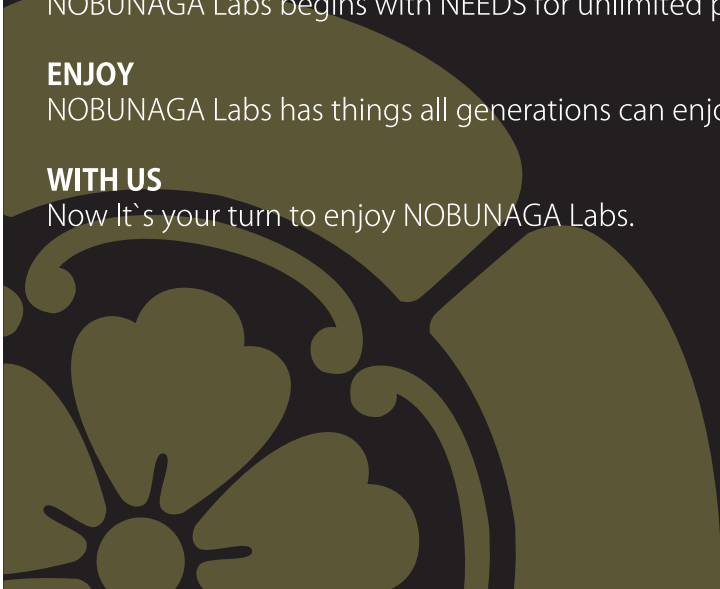

NOBUNAGA Labs

SUPREME

NOBUNAGA Labs High Class Supreme series
Harmonious and overwhelming spatial expression

4N pure silver Gold-plating wire for natural sound and high resolution.

The 4N pure silver wire, which allows enables delicate and expressive reproduction, achieves balanced natural and vibrant mid-range while maintaining a clear high range with gold-plated wire.

In addition, it consists total 35 pcs of wire, the middle size wire consists 7 smallest wires and it becomes 5 middle size wires, expressing even the slightest sound change.

In addition, by circularizing the conductor, the flexibility and durability of the conductor itself is dramatically improved. Stable signal transmission is possible even when exposed to bending or rapid temperature changes.



IPX ReCable

NOBUNAGA Labs
SUPREME

Common Specification

- Cable : 8cores of gold-plated 4N Pure silver
- Cable length : 120cm
- Connector : IPX (NLP-IPX-DIY)
- Impedance : Less than 0.5Ω
- SUPPORT : Ultimate Ears : UE LIVE、UE18+Pro、UE11Pro、UE Pro Reference Remastered UE7Pro、UE6Pro、UE5Pro etc.




GERONIMO

ジェロニモ



GERONIMO

- PLUG : NOBUNAGA Labs original 3.5mm 3pole Stereo mini plug (NLP-PRO-TP3.5)

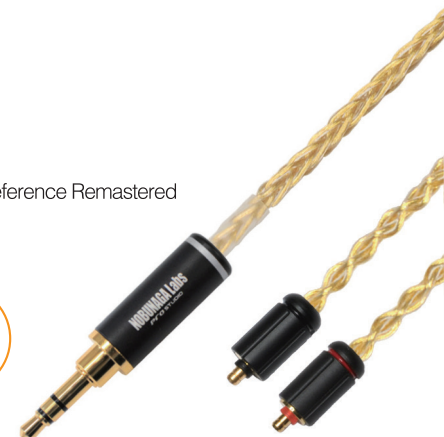

COCHISE

コーチズ



COCHISE

- PLUG : NOBUNAGA Labs original 2.5mm 4pole Balance plug (NLP-PRO-IS2.5)



DIABLO

ディアブロ



DIABLO

- PLUG : NOBUNAGA Labs original 4.4mm 5pole SBalance plug (NLP-PRO-TP4.5)



Common Specification

- Cable : 8cores of gold-plated 4N Pure silver
- Cable length : 120cm
- Connector : Gold plated MMCX (NLP-MMCX-DIY)
- Impedance : Less than 0.5Ω
- SUPPORT : Campfire Audio : POLARIS • ANDOROMEDA... / JVC : HA-FX850 • HA-FX1100...
SHURE : SE215 • SE315 • SE425 • SE535 • SE846 / Ultimate ears : UE900 (S) etc,



KAGARIBI

- PLUG : NOBUNAGA Labs original 3.5mm
3pole Streo mini plug (NLP-PRO-TP3.5)



Common Specification

- Cable : 8cores of gold-plated 4N Pure silver
- Cable length : 120cm
- Connector : Gold plated Custom 2Pin (NLP-CIEM-DIY)
- Impedance : Less than 0.5Ω
- SUPPORT : CIEM(expect Ultimate ears)
- ※ It is not intended to guarantee the operation of all of the product.




Enkidu

エンキドゥ

Enkidu

- PLUG : NOBUNAGA Labs original 3.5mm
3pole Streo mini plug (NLP-PRO-TP3.5)

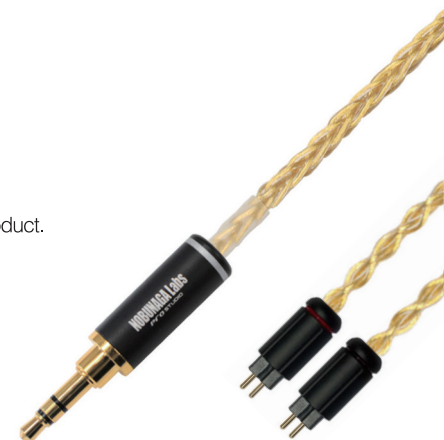

COCHOU

- PLUG : NOBUNAGA Labs original 2.5mm
4pole Balance plug (NLP-PRO-IS2.5/4)



Ishtar

イシュタル

Ishtar

- PLUG : NOBUNAGA Labs original 2.5mm
4pole Balance plug (NLP-PRO-IS2.5)



MIOTUKUSHI

- PLUG : NOBUNAGA Labs original 4.4mm
5pole Balance plug (NLP-PRO-TP4.4/5)



Gilgameš

ギルガメシュ

Gilgames

- PLUG : NOBUNAGA Labs original 4.4mm
5pole SBalance plug (NLP-PRO-TP4.5)



New conductor of 3 types of mixture, which was developed by uniquely combining the wire material.

By focusing on gold plating 4N pure silver gold plating, and using 4N silver and 6N OCC as one core wire, a three-dimensional sound field space with excellent resolution, depth, and height is realized.

It produces a clear and expansive mid-high range and a tight low end, producing a natural and expansive rich sound.

In addition, 33 cores per core, 4 cores structure brings out a rich sound with depth and a high range that is transparent and draws out a low range with a quick response and a lively feeling, over all bands.

Common Specification

- Cable : 4cores of Mixed cable
- Material per 1 wire : Gold plated 4N silver cable + 4N pure silver cable+ 6N OCC
- Cable length : 120cm
- Connector : Gold plated MMCX (NLP-MMCX-DIY)
- Impedance : Less than 0.3Ω
- SUPPORT : Campfire Audio : POLARIS • ANDOROMEDA... / JVC : HA-FX850 • HA-FX1100...
SHURE : SE215 • SE315 • SE425 • SE535 • SE846 / Ultimate ears : UE900 (S) etc

壺
春



UAE TSUKI

- PLUG : NOBUNAGA Labs original 3.5mm
3pole Streo mini plug (NLP-PRO-TP3.5)



Common Specification

- Cable : 4cores of Mixed cable
- Material per 1 wire : Gold plated 4N silver cable + 4N pure silver cable+ 6N OCC
- Cable length : 120cm
- Connector : Gold plated Custom 2Pin (NLP-CIEM-DIY)
- Impedance : Less than 0.3Ω
- SUPPORT : CIEM(expect Ultimate ears)
- ※ It is not intended to guarantee the operation of all of the product.



Volga
ボルガ



Volga

- PLUG : NOBUNAGA Labs original 3.5mm
3pole Streo mini plug (NLP-PRO-TP3.5)



篠
波



SASANAMI

- PLUG : NOBUNAGA Labs original 2.5mm
4pole Balance plug (NLP-PRO-IS2.5/4)



Bennett
ベネット



Bennett

- PLUG : NOBUNAGA Labs original 2.5mm
4pole Balance plug (NLP-PRO-IS2.5)



薦
枕



KOMO MAKURA

- PLUG : NOBUNAGA Labs original 4.4mm
5pole Balance plug (NLP-PRO-TP4.5)



Matador
マタドール



Matador

- PLUG : NOBUNAGA Labs original 4.4mm
5pole SBalance plug (NLP-PRO-TP4.5)



Common Specification

- Cable : Soft type OFC 4cores(Less touch noise)
- Cable length : 120cm
- Connector : Gold plated MMCX (NLP-MMCX-DIY)
- Cable Stopper/Slider : Nobunaga custom Cable Stopper / Slider
- Impedance : Less than 0.09Ω
- Cryogenic Processed : Put in -156°C low temperature for 72 hours
- SUPPORT : Campfire Audio : POLARIS • ANDOROMEDA... / JVC : HA-FX850 • HA-FX1100...
SHURE : SE215 • SE315 • SE425 • SE535 • SE846 / Ultimate ears : UE900 (S) etc.,

友禅
ゆうぜん

YUGEN

- PLUG : NOBUNAGA Labs original 3.5mm
3pole Streo mini plug (NLP-PRO-TP3.5)



更紗
さらさ

SARASA

- PLUG : NOBUNAGA Labs original 2.5mm
4pole Balance plug (NLP-PRO-IS2.5/4)



辻が花
つじがはな

TSUJIGA HANA

- PLUG : NOBUNAGA Labs original 4.4mm
5pole Balance plug (NLP-PRO-TP4.4/5)



Common Specification

- Cable : Soft type OFC 4cores(Less touch noise)
- Cable length : 120cm
- Connector : Gold plated Custom 2Pin (NLP-CIEM-DIY)
- Cable Stopper/Slider : Nobunaga custom Cable Stopper / Slider
- Impedance : Less than 0.09Ω
- Cryogenic Processed : Put in -156°C low temperature for 72 hours
- SUPPORT : CIEM(expect Ultimate ears)
- ※ It is not intended to guarantee the operation of all of the product




SIENNA

シエナ

SIENNA

- PLUG : NOBUNAGA Labs original 3.5mm
3pole Streo mini plug (NLP-PRO-TP3.5)

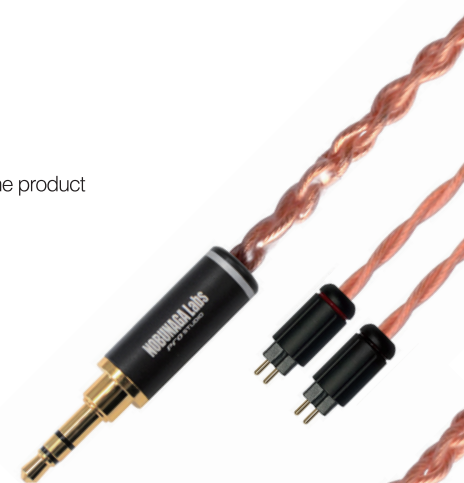

LORE

ロア

LORE

- PLUG : NOBUNAGA Labs original 2.5mm
4pole Balance plug (NLP-PRO-IS2.5/4)



WEDGWOOD

ウェッジウッド

WEDGWOOD

- PLUG : NOBUNAGA Labs original 4.4mm
5pole Balance plug (NLP-PRO-TP4.4/5)





Celebrating its third anniversary,
Nobunaga Labs has proudly launched the Hybrid Cable Series.
The Hybrid Cable Series offer unique sound characteristics
by expanding the capabilities of the soundstage wider and tautening
the bass frequencies with more control.

MMCX ReCable

NOBUNAGA Labs
HYBRID

Common Specification

- CABLE : 7N OCC silver plated 4 cores + silver 4 cores
- LENGTH : 120cm
- CONNECTOR : Gold plated MMCX KIT (NLP-MMCX-DIY)
- IMPEDANCE : 0.28Ω
- CRYOGENIC PROCESSED : Put in -156 °C low temperature for 72 hours
- SUPPORT : Campfire Audio : POLARIS • ANDOROMEDA... / JVC : HA-FX850 • HA-FX1100...
SHURE : SE215 • SE315 • SE425 • SE535 • SE846 / Ultimate ears : UE900 (S) etc.,

村正
むらませ

MURAMASA

- PLUG : NOBUNAGA Labs original 3.5mm
3pole Stereo mini plug (NLP-PRO-TP3.5)



虎徹
こてつ

KOTETSU

- PLUG : NOBUNAGA Labs original 2.5mm
4pole Balance plug (NLP-PRO-IS2.5/4)



姫鶴
ひめづる

HIMEDURU

- PLUG : NOBUNAGA Labs original 4.4mm
5pole Balance plug (NLP-PRO-TP4.4/5)



Common Specification

- CABLE : 7N OCC silver plated 4 cores + silver 4 cores
- LENGTH : 120cm
- CONNECTOR : Gold plated CUSTOM 2PIN KIT(NLP-CIEM-DIY)
- IMPEDANCE : 0.28Ω
- CRYOGENIC PROCESSED : Put in -156 °C low temperature for 72 hours
- SUPPORT : CIEM (except Ultimate ears)



BAHAMUT

バハムート

BAHAMUT

- PLUG : NOBUNAGA Labs original 3.5mm 3pole Streo mini plug (NLP-PRO-TP3.5)



Common Specification

- CABLE : 7N OCC silver plated 4 cores + silver 4 cores
- LENGTH : 120cm
- CONNECTOR : Gold plated original SENNHEISER 2 PIN
- IMPEDANCE : 0.28Ω
- CRYOGENIC PROCESSED : Put in -156 °C low temperature for 72 h
- SUPPORT : SENNHEISER IE80S • IE80 • IE8



SUIREN

- PLUG : NOBUNAGA Labs original 3.5mm 3pole Streo mini plug (NLP-PRO-TP3.5)




LEVIATHAN

リヴァイアサン

LEVIATHAN

- PLUG : NOBUNAGA Labs original 2.5mm 4pole Balance plug (NLP-PRO-IS2.5/4)



AYAME

- PLUG : NOBUNAGA Labs original 2.5mm 4pole Balance plug (NLP-PRO-IS2.5/4)



ODIN

オーディン

ODIN

- PLUG : NOBUNAGA Labs original 4.4mm 5pole Balance plug (NLP-PRO-TP4.4/5)



MIZUAOI

- PLUG : NOBUNAGA Labs original 4.4mm 5pole Balance plug (NLP-PRO-TP4.4/5)



Common Specification

- CABLE : 7N OCC silver plated 4 cores + silver 4 cores
- LENGTH : 120cm
- IMPEDANCE : 0.28Ω
- CRYOGENIC PROCESSED : Put in -156 °C low temperature for 72 hours
- SUPPORT : SONY MDR-1A • MDR-100A

素盞鳴
すさなう

SUSANOO

- PLUG : NOBUNAGA Labs original 3.5mm 4pole balance plug
- CONNECTOR : NOBUNAGA Labs 2.5mm 4pole stereo mini plug

五十猛
いたける

ITAKERU

- PLUG : NOBUNAGA Labs original 3.5mm 4pole balance plug
- CONNECTOR : NOBUNAGA Labs 4.4mm 5pole stereo plug



Common Specification

- CABLE : 7N OCC silver plated 4 cores + silver 4 cores
- LENGTH : 120cm
- CONNECTOR : 3.5mm 3poleGold plated NLP-PRO-TP3.5 x2
- SUPPORT : SONY MDR-1A • MDR-100A
- IMPEDANCE : 0.28Ω
- CRYOGENIC PROCESSED : Put in -156 °C low temperature for 72 hours
- SUPPORT : DENON — AH-D7200 • AH-D7100 • AH-D5200 • AH-D600
SONY — MDR-Z1R • MDR-Z7
JVC — HA-SW01 • HA-SW02
PIONEER — SE-MONITOR5
Technics — EAH-T700
FOCAL — Clear Professional

竜頭
りゅうず

RYUZE

- PLUG : NOBUNAGA Labs original 2.5mm 4pole balance plug(NLP-PRO-IS2.5/4)

葦葦
けごん

KEGON

- PLUG : NOBUNAGA Labs original 4.4mm 5pole balance plug(NLP-PRO-TP4.4/5)



MMCX ReCable (Silver plated)

NOBUNAGA Labs
PREMIUM

Common Specification

- Cable : silver plated 8 cores
- Cable length : 120cm
- Connector : Silver plated MMCX (NLP-MMCX-DIY-S)
- Impedance : Less than 0.28Ω
- SUPPORT : Campfire Audio : POLARIS • ANDOROMEDA... / JVC : HA-FX850 • HA-FX1100...
SHURE : SE215 • SE315 • SE425 • SE535 • SE846 / Ultimate ears : UE900 (S) etc.,



ONIMARU KAI

- PLUG : 3.5mm Silver plated
3pole stereo mini plug (NLP-PRO-TP3.5-S)



RAIKIRI KAI S

- PLUG : 2.5mm Silver plated
4pole balance plug (NLP-PRO-TP2.5/4-S)



KAGEMITSU S

- PLUG : 4.4mm Silver plated
5pole stereo balance plug (NLP-PRO-TP4.4/5-S)



MMCX ReCable

NOBUNAGA Labs
PREMIUM

Common Specification

- Cable : silver plated 8 cores
- Cable length : 120cm
- Connector : Gold plated MMCX KIT (NLP-MMCX-DIY)
- Impedance : Less than 0.28Ω
- SUPPORT : Campfire Audio : POLARIS • ANDOROMEDA... / JVC : HA-FX850 • HA-FX1100...
SHURE : SE215 • SE315 • SE425 • SE535 • SE846 / Ultimate ears : UE900 (S) etc.,



ONIMARU KAI

- PLUG : NOBUNAGA Labs 3.5mm
3pole stereo mini plug (NLP-PRO-TP3.5)



RAIKIRI KAI

- PLUG : NOBUNAGA Labs original 2.5mm
4pole balance plug (NLP-PRO-IS2.5/4)



KAGEMITSU

- PLUG : NOBUNAGA Labs 4.4mm
5pole stereo balance plug (NLP-PRO-TP4.4/5)



CUSTOM ReCable (Silver plated)

NOBUNAGA Labs
PREMIUM

qdc Type ReCable

NOBUNAGA Labs
PREMIUM

Common Specification

- Cable : silver plated 8 cores
- Cable length : 120cm
- Connector : Silver plated MMCX (NLP-MMCX-DIY-S)
- Impedance : Less than 0.28Ω
- SUPPORT : CIEM(expect Ultimate ears)
 - ※ It is not intended to guarantee the operation of all of the product.



WALKURE *Silver*
—フルキューレ—

WALKURE S

- PLUG : 3.5mm 3pole Silver plated NLP-PRO-TP3.5



Common Specification

- Cable : silver plated 8 cores
- Cable length : 120cm
- Connector : Gold plated QDC 2 pin
- Impedance : Less than 0.35Ω
- SUPPORT : QDC - NEPTUNE · 2SE · 3SH · 4SS
 - ※ It is not intended to guarantee the operation of all of the product.

げんぶ
玄武

GENBU

- PLUG : NOBUNAGA Labs original 3.5mm 3pole Stereo mini plug (NLP-PRO-TP3.5)



MEDUSA *Silver*
—メデューサ—

MEDUSA S


- PLUG : 2.5mm 4pole Silver plated NLP-PRO-TP2.5



びやく
白虎

BYAKO

- PLUG : NOBUNAGA Labs original 2.5mm 4pole Balance plug (NLP-PRO-IS2.5/4)

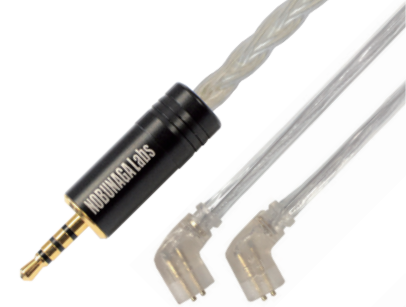

HERCULES *Silver*
—ヘラクレス—

HERCULES S

- PLUG : 4.4mm 5pole Silver plated NLP-PRO-TP4.4



すざく
朱雀

SUZAK

- PLUG : NOBUNAGA Labs original 4.4mm 5pole Balance plug (NLP-PRO-TP4.4/5)





TOMBOGIRI

- PLAY PLUG : 3.5mm 3pole stereo mini plug (NLP-PRO-TP3.5)
- HEADPHONE PLUG : 3.5mm 3pole stereo mini plug (NLP-PRO-TP3.5)
- SUPPORT : Audio-technica ATH-MSR7
beats Studio / Pro / Solo HD / Mixr
SONY MDR-1R Etc.,



OOCHIDORI

- PLUG : NOBUNAGA Labs original 3.5mm 4pole balance plug
- CONNECTOR : NOBUNAGA Labs 4.4mm 5pole balance plug



OTEGINE

- PLAY PLUG : NOBUNAGA Labs original 3.5mm 4pole balance plug (NLP-PRO-IS3.5/4)
- HEADPHONE PLUG : NOBUNAGA Labs 2.5mm 4pole stereo mini plug (NLP-PRO-IS2.5/4)
- SUPPORT : SONY MDR-1A • MDR-100A



Common Specification

- CABLE : Silver plated OFC 8cores
- LENGTH : 120cm
- IMPEDANCE : 0.28Ω
- CRYOGENIC PROCESSED : Put in -156 °C low temperature for 72 hours



TR SE3

- CONNECTOR : Gold plated MMCX KIT
- SUPPORT : SHURE SE series,
Ultimate Ears UE900(S),
JVC HA-FX850 • FX1100



TR UE3

- CONNECTOR : Gold plated UE KIT
- SUPPORT : Ultimate Ears Triple.Fi 10



TR IE3

- CONNECTOR : Gold plated SENNHEISER KIT
- SUPPORT : SENNHEISER IE8/IE80



TR IM3

- CONNECTOR : Gold plated audio-technica KIT
- SUPPORT : audio-technica ATH-IM50 • 70 • 01 • 02 • 03 • 04
- ※Without wire type (part of connector)

Common Specification

- CABLE : OFC 3 cores
- LENGTH : 1.2m
- PLUG : Molding type L plug
- CRYOGENIC PROCESSED : Put in -156 °C low temperature for 48 hours



TR SE2

- CONNECTOR : Gold plated MMCX KIT
- SUPPORT : SHURE SE series,
Ultimate Ears UE900(S),
JVC HA-FX850 • FX1100



TR UE2

- CONNECTOR : Gold plated UE KIT
- SUPPORT : Ultimate Ears Triple.Fi 10



TR IE2

- CONNECTOR : Gold plated SENNHEISER KIT
- SUPPORT : SENNHEISER IE8/IE80



TR CE2

- CONNECTOR : Gold plated original A2DC KIT
- SUPPORT : Audio-technica Eseries
CKS1100 • CKR90 • CKR100

Common Specification

- CABLE : OFC 3 cores covered cotton fabric
- LENGTH : 1.2m
- PLUG : Molding type I plug
- CRYOGENIC PROCESSED : Put in -156 °C low temperature for 48 hours
- ※ Without wire type (part of connector)

NLP-PRO-TP3.5

Connector type: 3.5mm 3pole stereo mini plug

- Size
 - Total length : 44.5mm
 - Cable entrance : for cables with $\varnothing$: $\sim$ 4.0mm
 - Max outer diameter : 9.0 mm



NLP-PRO-IS2.5

Connector type: 2.5mm 4pole balance plug

- Size
 - Total length : 32.7mm
 - Cable entrance : for cables with $\varnothing$: $\sim$ 4.2mm
 - Max outer diameter : 8.0 mm



NLP-PRO-IS3.5/4

Connector type: 3.5mm 4pole balance plug

- Size
 - Total length : 40.7mm
 - Cable entrance: for cables with $\varnothing$: $\sim$ 4.0mm
 - Max outer diameter: 9.0 mm



NLP-PRO-TP4.4/5

Connector type: 4.4mm 5pole balance plug

- Size
 - Total length : 47.5mm
 - Cable entrance: for cables with $\varnothing$: $\sim$ 5.0mm
 - Max outer diameter: 9.0 mm



NLP-PRO-TPFEM

Connector type: 2.5mm 4pole female jack

- Size
 - Total length : 27.8mm
 - Cable entrance: for cables with $\varnothing$: $\sim$ 5.0mm
 - Max outer diameter: 9.0 mm



Common Specification

- Material
 - BODY : Strong 24K Gold plated
 - SHELL : Brass with matte black coated

NLP-PRO-TP3.5-S

Connector type: 3.5mm 3pole Silver plated plug

- Size
 - Total length : 44.5mm
 - Cable entrance : for cables with $\varnothing$: $\sim$ 4.0mm
 - Max outer diameter : 9.0 mm



NLP-PRO-TP2.5-S

Connector type: 2.5mm 4pole Silver plated balance plug

- Size
 - Total length : 35.3mm
 - Cable entrance : for cables with $\varnothing$: $\sim$ 4.0mm
 - Max outer diameter : 9.0 mm



NLP-PRO-TP4.4-S

Connector type: 4.4mm 5pole Silver plated balance plug

- Size
 - Total length : 44.7mm
 - Cable entrance: for cables with $\varnothing$: $\sim$ 5.0mm
 - Max outer diameter: 9.0 mm



Common Specification

- Material
 - BODY : Silver plated
 - SHELL : Brass with matte black coated

NLP-PRO-TPFEM4.4/5

Connector type: 4.4mm 5pole female jack

- Size
Total Length : 28mm
Cable entrance: for cables with Ø : ~5.5mm
Max outer diameter: 11mm



MUTORY MT-CS25-BK



NLP-PRO-TP4.4/5CQ

Connector type: 4.4mm 5pole balance plug(Pure Copper)

- Size
Total length: 47.5mm
Cable entrance: for cables with Ø : ~5.0mm
Max outer diameter: 9.0mm



*including not for earphone and ear tip

MUTORY MT-CS25

Suitable for CIEM

Protecting an earphone from disconnection!

Size:

- Inside : 86 * 86 * 36 (mm)
- outside : 95 * 95 * 45 (mm)

Weight : 70g (product only)

Material

- Inside : polyurethan
- Outside : Nylon
- Reel : EVA resin



Package Including:

- MT-CS25 Case *1pc
- NOBUNAGA Labs Dry Keeper Mini *1pc
- Carabiner *1pc



CIEM DIY KIT

【CIEM Connector】

- Material
BODAY : BRASS WITH GOLD PLATED
PIN : BRASS WITH GOLD PLATED
SHELL : ALUMINUM WITH CLEAR ANODIC TREATMENT
- Size : ~3.0mm

※Recommend soldering temperature

Temperature Soldering iron, please keep 300 degree within 10 seconds

Temperature Soldering iron, please keep 350 degree within 10 seconds

Temperature Soldering iron, please keep 400 degree within 5 seconds

【Cable Stopper】

- Material
BODY/SHELL : ALUMINUM WITH CLEAR ANODIC TREATMENT
(ALUMINUM WITH BLACK ANODIC TREATMENT)
- Size
Front : ~2.3mm x 2
Cable : ~4.0mm

【Cable Slider】

- Material
BODY : ALUMINUM WITH MATTE BLACK ANODIC TREATMENT
- Size Front Hole : 2.3mm x 2



CIEM DIY KIT S

【CIEM Connector】

- Material
BODAY : BRASS WITH SILVER PLATED
PIN : BRASS WITH SILVER PLATED
SHELL : ALUMINUM WITH CLEAR ANODIC TREATMENT
- Size : ~3.0mm

※Recommend soldering temperature

Temperature Soldering iron, please keep 300 degree within 10 seconds

Temperature Soldering iron, please keep 350 degree within 10 seconds

Temperature Soldering iron, please keep 400 degree within 5 seconds

【Cable Stopper】

- Material
BODY/SHELL : ALUMINUM WITH CLEAR ANODIC TREATMENT
(ALUMINUM WITH BLACK ANODIC TREATMENT)
- Size
Front : ~2.3mm x 2
Cable : ~4.0mm

【Cable Slider】

- Material
BODY : ALUMINUM WITH MATTE BLACK ANODIC TREATMENT
- Size Front Hole : 2.3mm x 2



MMCX DIY KIT

【MMCX Connector】

- Material
BODY : BRASS WITH GOLD PLATED
PIN : BRASS WITH GOLD PLATED
SHELL : ALUMINUM WITH CLEAR ANODIC TREATMENT
- Size : ~3.0mm
※Recommend soldering temperature:
Temperature Soldering Iron, please keep 300 degree within 10 second
Temperature Soldering Iron, please keep 350 degree within 10 second
Temperature Soldering Iron, please keep 400 degree within 5 second

【Cable Stopper】

- Material
BODY / SHELL : ALUMINUM WITH CLEAR ANODIC TREATMENT
(ALUMINUM WITH BLACK ANODIC TREATMENT)
- Size
Front : ~ 2.0mm x 2
Cable : ~ 4.0mm



MMCX DIY KIT S

【MMCX Connector】

- Material
BODY : BRASS WITH SILVER PLATED
PIN : BRASS WITH SILVER PLATED
SHELL : ALUMINUM WITH CLEAR ANODIC TREATMENT
- Size : ~3.0mm
※Recommend soldering temperature:
Temperature Soldering Iron, please keep 300 degree within 10 second
Temperature Soldering Iron, please keep 350 degree within 10 second
Temperature Soldering Iron, please keep 400 degree within 5 second

【Cable Stopper】

- Material
BODY / SHELL : ALUMINUM WITH CLEAR ANODIC TREATMENT
(ALUMINUM WITH BLACK ANODIC TREATMENT)
- Size
Front : ~ 2.0mm x 2
Cable : ~ 4.0mm

MATERIAL : silicon



Refill Products



DRY KEEPER

- Plastic case * 1pcs
- NOBUNAGA Labs Dry Keeper * 1pcs
- MATERIAL : Sillica gel



Double TIP-2 (BLACK 2PAIRS)
Double TIP-2CL (CLEAR 2PAIRS)

MATERIAL : silicon
SUPPORT : refer to homepage
SIZE :1st Tip : diameter 10mm / height 5mm
SIZE : 2nd Tip : diameter 13mm / height 8mm



SH1-1 POLYURETHAN TIP


- MATERIAL : polyurethan
- SUPPORT : Only Shure SE series



UE-1 POLYURETHAN TIP

- MATERIAL : polyurethan
- SUPPORT : Ultimate Ears TripleFi-10, UE900, Etc.,

AKG	IP2 K324P/321/330/340
audio-technica	ATH-CK1 ATH-CK300S/M ATH-CK51/52 ATH-CKM50/CKM30
Beyerdynamic	DT60PRO DTX100/80/60
Creative	EP-630/830
DENON	AH-C350/C452/C551/C700
JBL	Reference220
Kenwood	KH-C711
KOSS	KEB/24 KEB/20
Nuforce	NE-8
MONSTER	beats IE(dr.dre) turbine
Panasonic	RP-HC30 RP-HJE200/300/500/55/70 RP-HJE700 RP-HJE900
PHILIPS	SHE8500 SHE9500/9501 SHE9700/9701 SHE9620/9621 SHE9550/9551 SHE9600 SHE9800
Roland	RH-IE3 RH-ED1

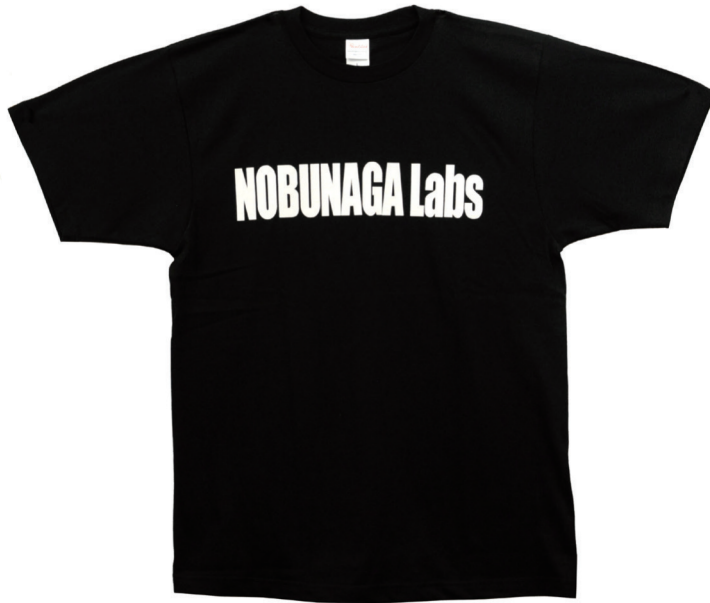

NLP-TST2016-L

SIZE L

- Shoulder : 50 cm
- Chest : 55 cm
- Length : 74 cm
- Sleeve : 22 cm

NLP-TST2016-XL

SIZE XL

- Shoulder : 53 cm
- Chest : 58 cm
- Length : 78 cm
- Sleeve : 24 cm



NOBUNAGA Labs