

NOBUNAGA Labs

www.nobunagalabs.com

Cosmos sakai Bld 7F

1-32-6 Asakusabashi Taitou-ku

Tokyo, 111-0053, Japan

Tel : 81-3-5829-9857

henry@nobunagalabs.com

NOBUNAGA Labs

About us

Through the establishment of WiseTech, Inc. in 2006 Tokyo, Japan. We have launched a new brand termed Nobunaga Labs in 2014.

Nobunaga Labs heavily values the quality of its manufactured wires. The main priority of the production process is to execute various examinations of the wires in order to procure the flawless performance and sound. We are committed to offer the cables assembled by these diligently processed wires exclusively.

We stand by the quality of our work. High quality products and customer service are guaranteed at an affordable price. Nobunaga Labs is ultimately formed by the boundless passions for music as it continues to challenge itself to discover the superior sound through development and research.

DESIGNED

NOBUNAGA Labs is 100% designed in Japan.

GOOD QUALITY


NOBUNAGA Labs begins with NEEDS for unlimited passion for music sound.

ENJOY

NOBUNAGA Labs has things all generations can enjoy.

WITH US

Now It's your turn to enjoy NOBUNAGA Labs.

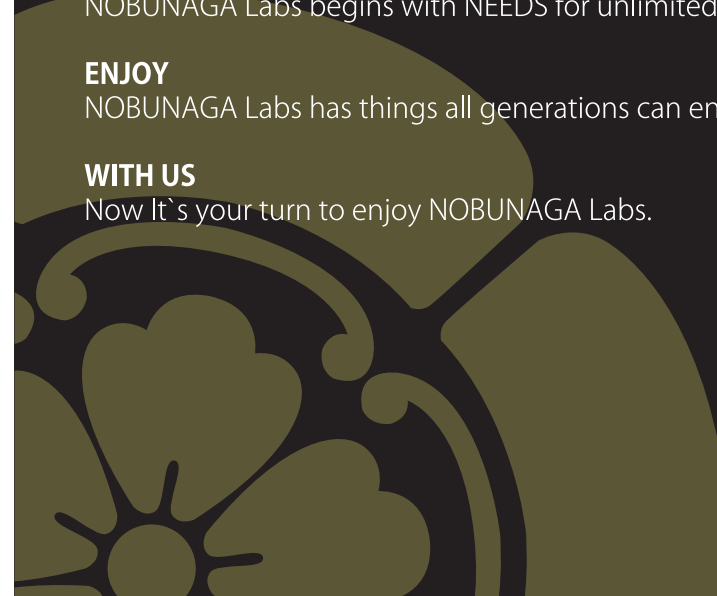

NOBUNAGA Labs
VISION



New High-End cable NOBUNAGA LABS VISION series

Palladium-plated 4N pure silver wire has a high expressive power that reproduces the nuances of musical performance, the texture of musical instruments, and even the echoes of fading echoes.

The superior resolution creates expressive contrasts, and beautifully accentuate the contours of the sound.

The 8cores configuration with 35 wires per 1core dramatically improves the sound image localization and the amount of information, and reproduces even the finest sound textures in fine detail.

The result is a rich bass with a realistic sense of space description, and a lustrous and elongated mid-to-high range.

Furthermore, the flexibility and durability of the conductor itself have been dramatically improved by making it a perfect circle.

The conductor itself is more flexible and durable than ever before, and can be bent and subjected to sudden temperature changes.

Common Specification

- Cable : 8cores of Palladium-plated 4N Pure silver
- Cable length : 120cm
- Connector : Gold plated MMCX (NLP-MMCX-DIY)
- Impedance : Less than 0.3Ω
- Support : JVC : HA-FX850 · HA-FX1100
SHURE : SE215 · SE315 · SE425 · SE535 · SE846



COSMO

- PLUG : NOBUNAGA Labs original 3.5mm
3pole Stereo mini plug (NLP-PRO-TP3.5)



Common Specification

- Cable: 8cores of Palladium-plated 4N Pure silver
- Cable length: 120cm
- Connector : Gold plated Custom 2PIN (NLP-CIEM-DIY)
- Impedance: Less than 0.3Ω
- SUPPORT : CIEM(expect Ultimate ears)
※ It is not intended to guarantee the operation of all of the product.

VESTA — ベスタ —

Enkidu-Omega

- PLUG : NOBUNAGA Labs original 3.5mm
3pole Stereo mini plug (NLP-PRO-TP3.5)



GYOKUTO

- PLUG : NOBUNAGA Labs original 4.4mm
5pole Balance plug (NLP-PRO-TP4.4/5)



CERES — ケレス —

Ishtar-Omega

- PLUG : NOBUNAGA Labs original 4.4mm
5pole SBalance plug (NLP-PRO-TP4.5)





NOBUNAGA Labs
SUPREME





NOBUNAGA Labs Supreme Flagship Series

16cores gold-plated 4N silver wire that realizes the best high-resolution sound

It has a natural sound and high resolution and expresses subtle changes in sound and a natural lingering sound

The 16cores configuration improves sound image positioning and increases sound graininess and resolution. Clearer, three-dimensional and wider sound quality than ever before. And it realizes unprecedented depth and dense presence.

In addition, by circularizing the conductor, the flexibility and durability of the conductor itself is dramatically improved. Stable signal transmission is possible even when exposed to bending or rapid temperature changes.



Common Specification

- Cable : 16 cores of gold-plated 4N Pure silver
- Cable length : 120cm
- Connector : Gold plated MMCX (NLP-MMCX-DIY)
- Impedance : Less than 0.5Ω
- SUPPORT : Campfire Audio : POLARIS • ANDOROMEDA... / JVC : HA-FX850 • HA-FX1100...
SHURE : SE215 • SE315 • SE425 • SE535 • SE846 / Ultimate ears : UE900 (S) etc,



KAGARIBI KIWAMI

- PLUG : NOBUNAGA Labs original 3.5mm
3pole Streo mini plug (NLP-PRO-TP3.5)




Common Specification

- Cable : 16 cores of gold-plated 4N Pure silver
- Cable length : 120cm
- Connector : Gold plated Custom 2Pin (NLP-CIEM-DIY)
- Impedance : Less than 0.5Ω
- SUPPORT : CIEM(expect Ultimate ears)
- ※ It is not intended to guarantee the operation of all of the product.



Enkidu-Omega

- PLUG : NOBUNAGA Labs original 3.5mm
3pole Streo mini plug (NLP-PRO-TP3.5)

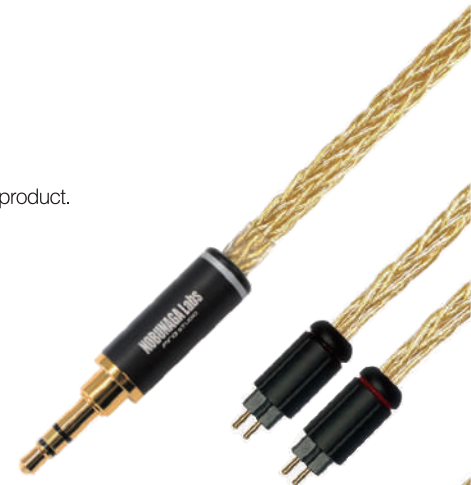

COCHOU KIWAMI

- PLUG : NOBUNAGA Labs original 2.5mm
4pole Balance plug (NLP-PRO-IS2.5/4)



Ishtar-Omega

- PLUG : NOBUNAGA Labs original 2.5mm
4pole Balance plug (NLP-PRO-IS2.5)



MIOTUKUSI KIWAMI

- PLUG : NOBUNAGA Labs original 4.4mm
5pole Balance plug (NLP-PRO-TP4.5/5)



Gilgameš-Omega

- PLUG : NOBUNAGA Labs original 4.4mm
5pole SBalance plug (NLP-PRO-TP4.5)



NOBUNAGA Labs
SUPREME



NOBUNAGA Labs High Class Supreme series

Harmonious and overwhelming spatial expression

4N pure silver Gold-plating wire for natural sound and high resolution.

The 4N pure silver wire, which allows enables delicate and expressive reproduction, achieves balanced natural and vibrant mid-range while maintaining a clear high range with gold-plated wire.

In addition, it consists total 35 pcs of wire, the middle size wire consists 7 smallest wires and it becomes 5 middle size wires, expressing even the slightest sound change.

In addition, by circularizing the conductor, the flexibility and durability of the conductor itself is dramatically improved. Stable signal transmission is possible even when exposed to bending or rapid temperature changes.

Common Specification

- Cable: 8cores of gold-plated 4N Pure silver
- Cable length: 120cm
- Connector : Pentaconn ear KIT (NLP-PNE-DIY)
- Impedance: Less than 0.5Ω
- Support: Acoustune : HS1697TI、HS1677SS、HS1657CU、HS1300SS
intime : 翔 (shou)、翔 DD(shou DD)Ø



翠嶂
すいしやう

SUISHOU

- PLUG : NOBUNAGA Labs original 3.5mm
3pole Streo mini plug (NLP-PRO-TP3.5)



嘉泉
かせん

KASEN


- PLUG : NOBUNAGA Labs original 2.5mm
4pole Balance plug (NLP-PRO-IS2.5/4)



寫楽
しゃらく

SHARAKU

- PLUG : NOBUNAGA Labs original 4.4mm
5pole Balance plug (NLP-PRO-TP4.4/5)

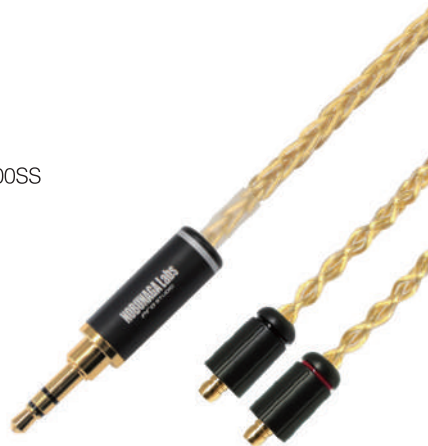

Common Specification


- Cable : 8cores of gold-plated 4N Pure silver
- Cable length : 120cm
- Connector : IPX (NLP-IPX-DIY)
- Impedance : Less than 0.5Ω
- SUPPORT : Ultimate Ears : UE LIVE、UE18+Pro、UE11Pro、UE Pro Reference Remastered
UE7Pro、UE6Pro、UE5Pro etc.



GERONIMO ジェロニモ

GERONIMO

- PLUG : NOBUNAGA Labs original 3.5mm
3pole Streo mini plug (NLP-PRO-TP3.5)



COCHISE コーチズ

COCHISE


- PLUG : NOBUNAGA Labs original 2.5mm
4pole Balance plug (NLP-PRO-IS2.5)



DIABLO ディアブロ

DIABLO

- PLUG : NOBUNAGA Labs original 4.4mm
5pole SBalance plug (NLP-PRO-TP4.5)

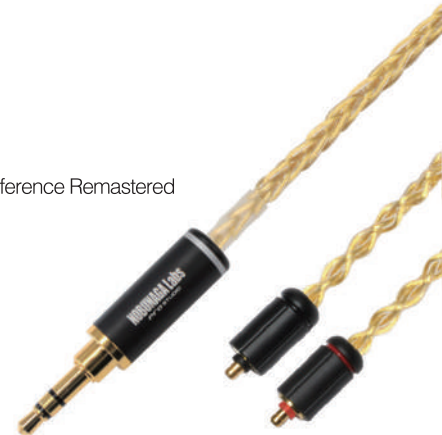

Common Specification

- Cable : 8cores of gold-plated 4N Pure silver
- Cable length : 120cm
- Connector : Gold plated MMCX (NLP-MMCX-DIY)
- Impedance : Less than 0.5Ω
- SUPPORT : Campfire Audio : POLARIS • ANDOROMEDA... / JVC : HA-FX850 • HA-FX1100...
SHURE : SE215 • SE315 • SE425 • SE535 • SE846 / Ultimate ears : UE900 (S) etc,



KAGARIBI

- PLUG : NOBUNAGA Labs original 3.5mm
3pole Streo mini plug (NLP-PRO-TP3.5)



COCHOU

- PLUG : NOBUNAGA Labs original 2.5mm
4pole Balance plug (NLP-PRO-IS2.5/4)



MIOTUKUSHI

- PLUG : NOBUNAGA Labs original 4.4mm
5pole Balance plug (NLP-PRO-TP4.4/5)



Common Specification

- Cable : 8cores of gold-plated 4N Pure silver
- Cable length : 120cm
- Connector : Gold plated Custom 2Pin (NLP-CIEM-DIY)
- Impedance : Less than 0.5Ω
- SUPPORT : CIEM(expect Ultimate ears)
- ※ It is not intended to guarantee the operation of all of the product.



Enkidu

エンキドゥ

Enkidu

- PLUG : NOBUNAGA Labs original 3.5mm
3pole Streo mini plug (NLP-PRO-TP3.5)



Ishtar

イシュタル

Ishtar

- PLUG : NOBUNAGA Labs original 2.5mm
4pole Balance plug (NLP-PRO-IS2.5)



Gilgameš

ギルガメシュ

Gilgames

- PLUG : NOBUNAGA Labs original 4.4mm
5pole SBalance plug (NLP-PRO-TP4.5)



New conductor of 3 types of mixture, which was developed by uniquely combining the wire material.

By focusing on gold plating 4N pure silver gold plating, and using 4N silver and 6N OCC as one core wire, a three-dimensional sound field space with excellent resolution, depth, and height is realized.

It produces a clear and expansive mid-high range and a tight low end, producing a natural and expansive rich sound.

In addition, 33 cores per core, 4 cores structure brings out a rich sound with depth and a high range that is transparent and draws out a low range with a quick response and a lively feeling, over all bands.

Common Specification

- Cable : 4cores of Mixed cable
- Material per 1 wire : Gold plated 4N silver cable + 4N pure silver cable+ 6N OCC
- Cable length : 120cm
- Connector : Gold plated MMCX (NLP-MMCX-DIY)
- Impedance : Less than 0.3Ω
- SUPPORT : Campfire Audio : POLARIS • ANDOROMEDA... / JVC : HA-FX850 • HA-FX1100...
SHURE : SE215 • SE315 • SE425 • SE535 • SE846 / Ultimate ears : UE900 (S) etc.,



UAE TSUKI

- PLUG : NOBUNAGA Labs original 3.5mm
3pole Streo mini plug (NLP-PRO-TP3.5)



SASANAMI

- PLUG : NOBUNAGA Labs original 2.5mm
4pole Balance plug (NLP-PRO-IS2.5/4)



KOMO MAKURA

- PLUG : NOBUNAGA Labs original 4.4mm
5pole Balance plug (NLP-PRO-TP4.5/5)



Common Specification

- Cable : 4cores of Mixed cable
- Material per 1 wire : Gold plated 4N silver cable + 4N pure silver cable+ 6N OCC
- Cable length : 120cm
- Connector : Gold plated Custom 2Pin (NLP-CIEM-DIY)
- Impedance : Less than 0.3Ω
- SUPPORT : CIEM(expect Ultimate ears)
- ※ It is not intended to guarantee the operation of all of the product.



Volga

- PLUG : NOBUNAGA Labs original 3.5mm
3pole Streo mini plug (NLP-PRO-TP3.5)



Bennett

- PLUG : NOBUNAGA Labs original 2.5mm
4pole Balance plug (NLP-PRO-IS2.5)



Matador

- PLUG : NOBUNAGA Labs original 4.4mm
5pole SBalance plug (NLP-PRO-TP4.5)



Common Specification

- Cable : 8cores of Mixed cable
- Material per 1 wire : Gold plated 4N silver cable + 4N pure silver cable+ 6N OCC
- Cable length : 120cm
- Connector : Gold plated MMCX (NLP-MMCX-DIY)
- Impedance : Less than 0.3Ω
- SUPPORT : Campfire Audio : POLARIS • ANDOROMEDA... / JVC : HA-FX850 • HA-FX1100...
SHURE : SE215 • SE315 • SE425 • SE535 • SE846 / Ultimate ears : UE900 (S) etc.,



UAE TSUKI URARA

- PLUG : NOBUNAGA Labs original 3.5mm
3pole Streo mini plug (NLP-PRO-TP3.5)



Common Specification

- Cable : 8cores of Mixed cable
- Material per 1 wire : Gold plated 4N silver cable + 4N pure silver cable+ 6N OCC
- Cable length : 120cm
- Connector : Gold plated Custom 2Pin (NLP-CIEM-DIY)
- Impedance : Less than 0.3Ω
- SUPPORT : CIEM(expect Ultimate ears)
- ※ It is not intended to guarantee the operation of all of the product.

NEXUS
Volga

ボルガ

Volga nexus

- PLUG : NOBUNAGA Labs original 3.5mm
3pole Streo mini plug (NLP-PRO-TP3.5)



SASANAMI URARA

- PLUG : NOBUNAGA Labs original 2.5mm
4pole Balance plug (NLP-PRO-IS2.5/4)



NEXUS
Bennett

ベネット

Bennett nexus

- PLUG : NOBUNAGA Labs original 2.5mm
4pole Balance plug (NLP-PRO-IS2.5)



KOMO MAKURA URARA

- PLUG : NOBUNAGA Labs original 4.4mm
5pole Balance plug (NLP-PRO-TP4.5)



NEXUS
Matador

マタドール

Matador nexus

- PLUG : NOBUNAGA Labs original 4.4mm
5pole SBalance plug (NLP-PRO-TP4.5)





NOBUNAGA Labs ADVANCE Black edition

By producing OFC tin plating with the original technology,
we realized dynamic and delicate mid-bass and excellent sound quality.



MMCX ReCable

Common Specification

- Cable: Tin plated OFC 4cores
- Cable length: 120cm
- Connector : Gold plated MMCX KIT (NLP-MMCX-DIY)
- Impedance: Less than 0.3Ω
- SUPPORT : Campfire Audio : POLARIS • ANDOROMEDA... / JVC : HA-FX850 • HA-FX1100...
SHURE : SE215 • SE315 • SE425 • SE535 • SE846 / Ultimate ears : UE900 (S) etc.,
- ※ It is not intended to guarantee the operation of all of the product.



SHOUKAKU

- PLUG : NOBUNAGA Labs original 3.5mm
3pole Stereo mini plug (NLP-PRO-TP3.5)



CHITOSE

- PLUG : NOBUNAGA Labs original 2.5mm
4pole Balance plug (NLP-PRO-IS2.5/4)



ZUIHOU

- PLUG : NOBUNAGA Labs original 4.4mm
5pole Balance plug (NLP-PRO-TP4.4/5)



CUSTOM ReCable

NOBUNAGA Labs
Advance

Common Specification

- Cable: Tin plated OFC 4cores
- Cable length: 120cm
- Connector : Gold plated Custom 2Pin KIT (NLP-CIEM-DIY)
- Impedance: Less than 0.3Ω
- SUPPORT: CIEM (except Ultimate ears)
- ※ It is not intended to guarantee the operation of all of the product.



VOYAGER

- PLUG : NOBUNAGA Labs original 3.5mm 3pole Stereo mini plug (NLP-PRO-TP3.5)



MAGELLAN

- PLUG : NOBUNAGA Labs original 2.5mm 4pole Balance plug (NLP-PRO-IS2.5/4)



CASSINI

- PLUG : NOBUNAGA Labs original 4.4mm 5pole Balance plug (NLP-PRO-TP4.4/5)



HeadPhone ReCable

NOBUNAGA Labs
Advance

Common Specification

- Cable : Tin plated OFC 4cores
- Cable length : 180cm
- Impedance : less than 0.9Ω
- ※ It is not intended to guarantee the operation of all of the product.



KIRIFURI

180cm


- CONNECTOR : NOBUNAGA Labs original 4.4mm 5pole Gold plated NLP-PRO-TP3.5
- PLUG : NOBUNAGA Labs original 3.5mm 2pole Gold plated plugx2



GAROU

180cm

- CONNECTOR : NOBUNAGA Labs original 3.5mm 3pole Gold plated NLP-PRO-TP3.5
- PLUG : NOBUNAGA Labs original 3.5mm 2pole Gold plated plugx2

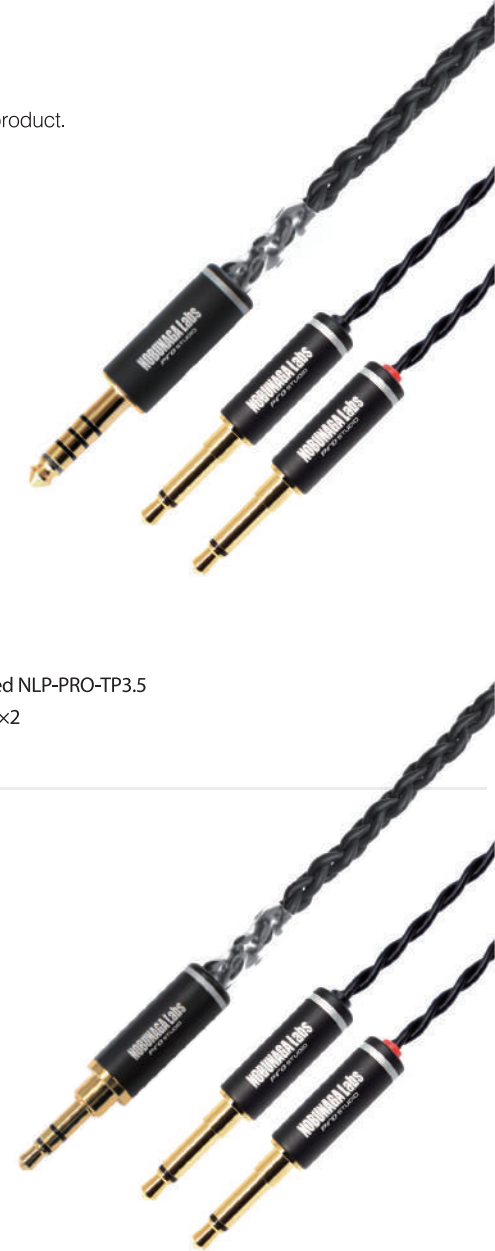

MMCX ReCable (Silver plated)

NOBUNAGA Labs
PREMIUM

Common Specification

- Cable : silver plated 8 cores
- Cable length : 120cm
- Connector : Silver plated MMCX (NLP-MMCX-DIY-S)
- Impedance : Less than 0.28Ω
- SUPPORT : Campfire Audio : POLARIS • ANDOROMEDA... / JVC : HA-FX850 • HA-FX1100...
SHURE : SE215 • SE315 • SE425 • SE535 • SE846 / Ultimate ears : UE900 (S) etc.,



ONIMARU KAI

- PLUG : 3.5mm Silver plated
3pole stereo mini plug (NLP-PRO-TP3.5-S)



RAIKIRI KAI S

- PLUG : 2.5mm Silver plated
4pole balance plug (NLP-PRO-TP2.5/4-S)



KAGEMITSU S

- PLUG : 4.4mm Silver plated
5pole stereo balance plug (NLP-PRO-TP4.4/5-S)



MMCX ReCable

NOBUNAGA Labs
PREMIUM

Common Specification

- Cable : silver plated 8 cores
- Cable length : 120cm
- Connector : Gold plated MMCX KIT (NLP-MMCX-DIY)
- Impedance : Less than 0.28Ω
- SUPPORT : Campfire Audio : POLARIS • ANDOROMEDA... / JVC : HA-FX850 • HA-FX1100...
SHURE : SE215 • SE315 • SE425 • SE535 • SE846 / Ultimate ears : UE900 (S) etc.,



ONIMARU KAI

- PLUG : NOBUNAGA Labs 3.5mm
3pole stereo mini plug (NLP-PRO-TP3.5)



RAIKIRI KAI

- PLUG : NOBUNAGA Labs original 2.5mm
4pole balance plug (NLP-PRO-IS2.5/4)



KAGEMITSU

- PLUG : NOBUNAGA Labs 4.4mm
5pole stereo balance plug (NLP-PRO-TP4.4/5)



CUSTOM ReCable (Silver plated)

NOBUNAGA Labs
PREMIUM

Common Specification

- Cable : silver plated 8 cores
- Cable length : 120cm
- Connector : Silver plated MMCX (NLP-MMCX-DIY-S)
- Impedance : Less than 0.28Ω
- SUPPORT : CIEM(expect Ultimate ears)
 - ※ It is not intended to guarantee the operation of all of the product.



WALKURE *Silver*
—フルキューレ—

WALKURE S

- PLUG : 3.5mm 3pole Silver plated NLP-PRO-TP3.5



MEDUSA *Silver*
—メデューサ—

MEDUSA S

- PLUG : 2.5mm 4pole Silver plated NLP-PRO-TP2.5



HERCULES *Silver*
—ヘラクレス—

HERCULES S

- PLUG : 4.4mm 5pole Silver plated NLP-PRO-TP4.4



HeadPhone ReCable

NOBUNAGA Labs
PREMIUM

Common Specification

- CABLE : Silver plated OFC 8cores
- LENGTH : 120cm
- IMPEDANCE : 0.28Ω
- CRYOGENIC PROCESSED : Put in -156°C low temperature for 72 hours



御手持

OTEGINE


- PLAY PLUG : NOBUNAGA Labs original 3.5mm 4pole balance plug (NLP-PRO-IS3.5/4)
- HEADPHONE PLUG : NOBUNAGA Labs 2.5mm 4pole stereo mini plug (NLP-PRO-IS2.5/4)
- SUPPORT : SONY MDR-1A • MDR-100A



おちどり
大千鳥

OOCHIDORI

- PLUG : NOBUNAGA Labs original 3.5mm 4pole balance plug
- CONNECTOR : NOBUNAGA Labs 4.4mm 5pole balance plug

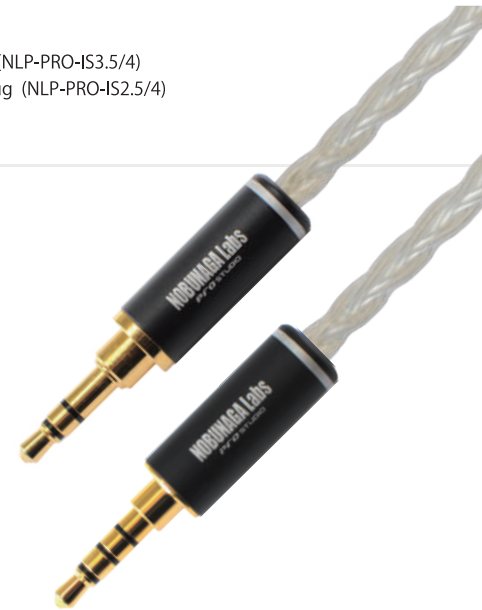

Common Specification

- LENGTH : 120cm
- IMPEDANCE : 0.09Ω
- PACKAGE : 70 * 17 * 125 (mm)



HIJIRI

- CABLE : silver plated Oxygen-Free Copper cable 4 cores
- CONNECTOR : Gold plated MMCX KIT
- Plug : 3.5mm 3pole stereo mini plug



KAGURA

- CABLE : silver plated Oxygen-Free Copper cable 4 cores
- CONNECTOR : Gold plated MMCX KIT
- Plug : 4.4mm 5pole Gold plated L plug




IBUKI

- CABLE : Tin plated Oxygen-Free Copper cable 4 cores
- CONNECTOR : Gold plated MMCX KIT
- Plug : 3.5mm 3pole stereo mini plug



MIKASA

- CABLE : Tin plated Oxygen-Free Copper cable 4 cores
- CONNECTOR : Gold plated MMCX KIT
- Plug : 4.4mm 5pole Gold plated L plug

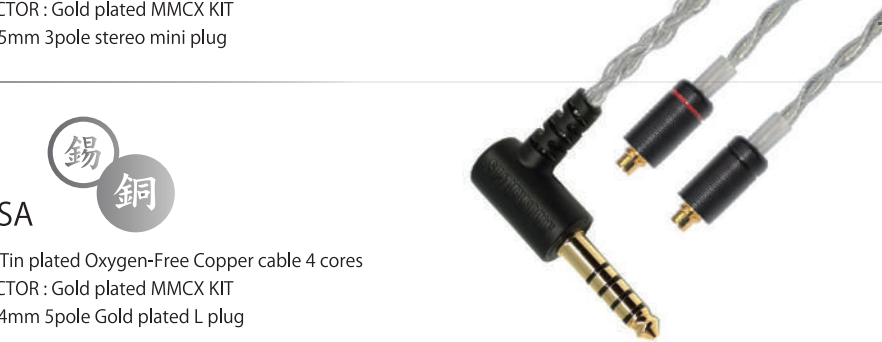

Common Specification

- LENGTH : 120cm
- IMPEDANCE : 0.09Ω
- PACKAGE : 70 * 17 * 125 (mm)

IRIS イリス



IRIS

- CABLE : silver plated Oxygen-Free Copper cable 4 cores
- CONNECTOR : Gold plated Custom IEM 2pin KIT
- Plug : 3.5mm 3pole stereo mini plug

MORPHEUS モルフェウス



MORPHEUS

- CABLE : silver plated Oxygen-Free Copper cable 4 cores
- CONNECTOR : Gold plated Custom IEM 2pin KIT
- Plug : 4.4mm 5pole Gold plated L plug

AURORA アウロラ



AURORA


- CABLE : Tin plated Oxygen-Free Copper cable 4 cores
- CONNECTOR : Gold plated Custom IEM 2pin KIT
- Plug : 3.5mm 3pole Gold plated plug

CEPHALUS ケファロス



CEPHALUS

- CABLE : Tin plated Oxygen-Free Copper cable 4 cores
- CONNECTOR : Gold plated Custom IEM 2pin KIT
- Plug : 4.4mm 5pole Gold plated L plug

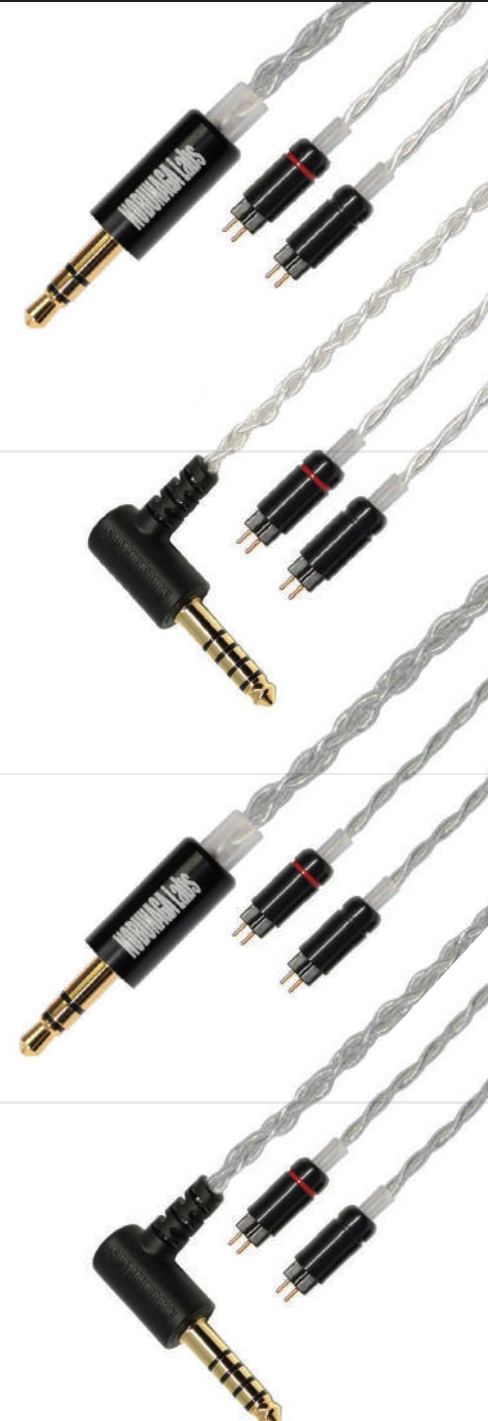

TR3 SERIES

NOBUNAGA Labs

TR2 SERIES

NOBUNAGA Labs



TR SE3

- CONNECTOR : Gold plated MMCX KIT
- SUPPORT : SHURE SE series,
Ultimate Ears UE900(S),
JVC HA-FX850 • FX1100



TR UE3

- CONNECTOR : Gold plated UE KIT
- SUPPORT : Ultimate Ears Triple.Fi 10



TR IE3

- CONNECTOR : Gold plated SENNHEISER KIT
- SUPPORT : SENNHEISER IE8/IE80



TR IM3

- CONNECTOR : Gold plated audio-technica KIT
- SUPPORT : audio-technica ATH-IM50 • 70 • 01 • 02 • 03 • 04
- ※Without wire type (part of connector)

Common Specification

- CABLE : OFC 3 cores
- LENGTH : 1.2m
- PLUG : Molding type L plug
- CRYOGENIC PROCESSED : Put in -156 °C low temperature for 48 hours



TR SE2

- CONNECTOR : Gold plated MMCX KIT
- SUPPORT : SHURE SE series,
Ultimate Ears UE900(S),
JVC HA-FX850 • FX1100



TR UE2

- CONNECTOR : Gold plated UE KIT
- SUPPORT : Ultimate Ears Triple.Fi 10



TR IE2

- CONNECTOR : Gold plated SENNHEISER KIT
- SUPPORT : SENNHEISER IE8/IE80



TR CE2

- CONNECTOR : Gold plated original A2DC KIT
- SUPPORT : Audio-technica Eseries
CKS1100 • CKR90 • CKR100

Common Specification

- CABLE : OFC 3 cores covered cotton fabric
- LENGTH : 1.2m
- PLUG : Molding type I plug
- CRYOGENIC PROCESSED : Put in -156 °C low temperature for 48 hours
- ※ Without wire type (part of connector)

NLP-PRO-TP3.5

Connector type: 3.5mm 3pole stereo mini plug

- Size
 - Total length : 44.5mm
 - Cable entrance : for cables with \varnothing : \sim 4.0mm
 - Max outer diameter : 9.0 mm



NLP-PRO-TP2.5

Connector type: 2.5mm 3pole stereo mini plug

- Size
 - Total length : 39mm
 - Cable entrance : for cables with \varnothing : \sim 4.0mm
 - Max outer diameter : 9.0 mm



NLP-PRO-TP4.4/5

Connector type: 4.4mm 5pole balance plug

- Size
 - Total length: : 47.5mm
 - Cable entrance: for cables with \varnothing : \sim 5.0mm
 - Max outer diameter: 9.0 mm



NLP-PRO-IS3.5/4

Connector type: 3.5mm 4pole balance plug

- Size
 - Total length: : 40.7mm
 - Cable entrance: for cables with \varnothing : \sim 4.0mm
 - Max outer diameter: 9.0 mm



NLP-PRO-IS2.5

Connector type: 2.5mm 4pole balance plug

- Size
 - Total length : 32.7mm
 - Cable entrance : for cables with \varnothing : \sim 4.2mm
 - Max outer diameter : 8.0 mm



Common Specification

- Material
 - BODY : Strong 24K Gold plated
 - SHELL : Brass with matte black coated

NLP-PRO-TP3.5-S

Connector type: 3.5mm 3pole Silver plated plug

- Size
 - Total length : 44.5mm
 - Cable entrance : for cables with \varnothing : \sim 4.0mm
 - Max outer diameter : 9.0 mm



NLP-PRO-TP2.5-S

Connector type: 2.5mm 4pole Silver plated balance plug

- Size
 - Total length : 35.3mm
 - Cable entrance : for cables with \varnothing : \sim 4.0mm
 - Max outer diameter : 9.0 mm



NLP-PRO-TP4.4-S

Connector type: 4.4mm 5pole Silver plated balance plug

- Size
 - Total length : 44.7mm
 - Cable entrance: for cables with \varnothing : \sim 5.0mm
 - Max outer diameter: 9.0 mm



Common Specification

- Material
 - BODY : Silver plated
 - SHELL : Brass with matte black coated

NLP-PRO-TP4.4/5CQ

Connector type: 4.4mm 5pole balance plug(Pure Copper)

- Size
Total length: 47.5mm
Cable entrance: for cables with Ø : ~5.0mm
Max outer diameter: 9.0mm

NLP-PRO-TP6.3-ST

Connector type: 6.3mm 3pole stereo plug

- Size
Total length: 70.5mm
Cable entrance: for cables with Ø : ~ 7.5mm
Max outer diameter: 13.0 mm

NLP-PRO-TP6.3MONO

Connector type: 6.3mm 2pole mono plug

- Size
Total length: 70.5mm
Cable entrance: for cables with Ø : ~ 7.5mm
Max outer diameter: 13.0 mm

NLP-PRO-TP6.3MO-CQ

Connector type: 6.3mm 2pole mono plug

- Size
Total length: 70.5mm
Cable entrance: for cables with Ø : ~ 7.5mm
Max outer diameter: 13.0 mm

Common Specification

- Material
BODY : Strong 24K Gold plated
SHELL : Brass with matte black coated

NLP-PRO-TP6.3MO-CQ-S

Connector type: 6.3mm 2pole Silver mono plug

- Size
Total length: 70.5mm
Cable entrance: for cables with Ø : ~ 7.5mm
Max outer diameter: 13.0 mm
BODY: Silver plated pure copper
SHELL: BRASS WITH MATTE BLACK COATED

NLP-PRO-TPFEM2.5/4

Connector type: 2.5mm 4pole female jack

- Size
Total length: : 27.8mm
Cable entrance: for cables with Ø : ~ 5.0mm
Max outer diameter: 9.0 mm

NLP-PRO-TPFEM4.4/5

Connector type: 4.4mm 5pole female jack

- Size
Total Length : 28mm
Cable entrance: for cables with Ø : ~5.5mm
Max outer diameter: 11mm

Common Specification

- Material
BODY : Silver plated
SHELL : Brass with matte black coated



CIEM DIY KIT

【CIEM Connector】

- Material
BODAY : BRASS WITH GOLD PLATED
PIN : BRASS WITH GOLD PLATED
SHELL : ALUMINUM WITH CLEAR ANODIC TREATMENT
- Size : ~3.0mm

【Cable Stopper】

- Material
BODY/SHELL : ALUMINUM WITH CLEAR ANODIC TREATMENT
(ALUMINUM WITH BLACK ANODIC TREATMENT)
- Size
Front : ~2.3mm x 2
Cable : ~4.0mm

※Recommend soldering temperature

Temperature Soldering iron, please keep 300 degree within 10 seconds

Temperature Soldering iron, please keep 350 degree within 10 seconds

Temperature Soldering iron, please keep 400 degree within 5 seconds

【Cable Slider】

- Material
BODY : ALUMINUM WITH MATTE BLACK ANODIC TREATMENT
- Size Front Hole : 2.3mm x 2



CIEM DIY KIT S

【CIEM Connector】

- Material
BODAY : BRASS WITH SILVER PLATED
PIN : BRASS WITH SILVER PLATED
SHELL : ALUMINUM WITH CLEAR ANODIC TREATMENT
- Size : ~3.0mm

【Cable Stopper】

- Material
BODY/SHELL : ALUMINUM WITH CLEAR ANODIC TREATMENT
(ALUMINUM WITH BLACK ANODIC TREATMENT)
- Size
Front : ~2.3mm x 2
Cable : ~4.0mm

※Recommend soldering temperature

Temperature Soldering iron, please keep 300 degree within 10 seconds

Temperature Soldering iron, please keep 350 degree within 10 seconds

Temperature Soldering iron, please keep 400 degree within 5 seconds

【Cable Slider】

- Material
BODY : ALUMINUM WITH MATTE BLACK ANODIC TREATMENT
- Size Front Hole : 2.3mm x 2



MMCX DIY KIT

【MMCX Connector】

- Material
BODY : BRASS WITH GOLD PLATED
PIN : BRASS WITH GOLD PLATED
SHELL : ALUMINUM WITH CLEAR ANODIC TREATMENT
- Size : ~3.0mm
※Recommend soldering temperature:
Temperature Soldering Iron, please keep 300 degree within 10 second
Temperature Soldering Iron, please keep 350 degree within 10 second
Temperature Soldering Iron, please keep 400 degree within 5 second

【Cable Stopper】

- Material
BODY / SHELL : ALUMINUM WITH CLEAR ANODIC TREATMENT
(ALUMINUM WITH BLACK ANODIC TREATMENT)
- Size
Front : ~ 2.0mm x 2
Cable : ~ 4.0mm



MMCX DIY KIT S

【MMCX Connector】

- Material
BODY : BRASS WITH SILVER PLATED
PIN : BRASS WITH SILVER PLATED
SHELL : ALUMINUM WITH CLEAR ANODIC TREATMENT
- Size : ~3.0mm
※Recommend soldering temperature:
Temperature Soldering Iron, please keep 300 degree within 10 second
Temperature Soldering Iron, please keep 350 degree within 10 second
Temperature Soldering Iron, please keep 400 degree within 5 second

【Cable Stopper】

- Material
BODY / SHELL : ALUMINUM WITH CLEAR ANODIC TREATMENT
(ALUMINUM WITH BLACK ANODIC TREATMENT)
- Size
Front : ~ 2.0mm x 2
Cable : ~ 4.0mm

**【IPX-DIY】**

• Material

BODY : BRASS WITH GOLD PLATED

PIN : BRASS WITH GOLD PLATED

SHELL : ALUMINUM WITH CLEAR ANODIC TREATMENT


• Size : ~3.0mm

※Recommend soldering temperature:

Temperature Soldering Iron, please keep 300 degree within 10 second

Temperature Soldering Iron, please keep 350 degree within 10 second

Temperature Soldering Iron, please keep 400 degree within 5 second

**【MMCX FEMALE Connector】**

• Material

GOLD PLATED BRASS

• Size : 7.50mm X \varnothing 4.60mm

※Recommend soldering temperature:

Temperature Soldering Iron, please keep 300 degree within 10 second

Temperature Soldering Iron, please keep 350 degree within 10 second

Temperature Soldering Iron, please keep 400 degree within 5 second

**【PNE-DIY】**

• Material

BODY : BRASS WITH GOLD PLATED

PIN : BRASS WITH GOLD PLATED

SHELL : ALUMINUM WITH CLEAR ANODIC TREATMENT

• Size : ~3.0mm

※Recommend soldering temperature:

Temperature Soldering Iron, please keep 300 degree within 10 second

Temperature Soldering Iron, please keep 350 degree within 10 second

Temperature Soldering Iron, please keep 400 degree within 5 second



SH1-1 POLYURETHAN TIP

- MATERIAL : polyurethan
- SUPPORT : Only Shure SE series



UE-1 POLYURETHAN TIP

- MATERIAL : polyurethan
- SUPPORT : Ultimate Ears TripleFi-10, UE900, Etc.,



Double TIP-2 (BLACK 2PAIRS)
Double TIP-2CL (CLEAR 2PAIRS)

MATERIAL : silicon
SUPPORT : refer to homepage
SIZE :1st Tip : diameter 10mm / height 5mm
SIZE : 2nd Tip : diameter 13mm / height 8mm

AKG	IP2 K324P/321/330/340
audio-technica	ATH-CK1 ATH-CK300S/M ATH-CK51/52 ATH-CKM50/CKM30
Beyerdynamic	DT60PRO DTX100/80/60
Creative	EP-630/830
DENON	AH-C350/C452/C551/C700
JBL	Reference220
Kenwood	KH-C711
KOSS	KEB/24 KEB/20
Nuforce	NE-8
MONSTER	beats IE(dr.dre) turbine
Panasonic	RP-HC30 RP-HJE200/300/500/55/70 RP-HJE700 RP-HJE900
PHILIPS	SHE8500 SHE9500/9501 SHE9700/9701 SHE9620/9621 SHE9550/9551 SHE9600 SHE9800
Roland	RH-iE3 RH-ED1



NLP-TST2016-L

SIZE L

- Shoulder : 50 cm
- Chest : 55 cm
- Length : 74 cm
- Sleeve : 22 cm

NLP-TST2016-XL

SIZE XL

- Shoulder : 53 cm
- Chest : 58 cm
- Length : 78 cm
- Sleeve : 24 cm

NOBUNAGA Labs